



Viewtron 64 Channel NVR

NVR

64ch NVR

12MP/8MP/6MP/5MP/4MP/3MP/1080P/720P HD NVR



VT-NVR-64



- ~ 64ch NVR for IP Cameras
- ~ 12mp, 4K / 8mp, 6mp, 5mp, 4mp, 3mp, 2mp / 1080p, 1mp / 720p Camera Support
- ~ 4K Live Display Output via HDMI, 1080p Display via VGA
- ~ 24ch Alarm Input, 8ch Alarm Output
- ~ 16 Hard Drive Bays, Supports RAID 0, 1, 5, 6, 10
- ~ Remote Access via Windows and Mac VMS Software
- ~ Remote Mobile Access via iPhone and Android Apps
- ~ Alarm Alerts via Email and Push Notification to Mobile Apps
- ~ Facial Detection, License Plate Recognition (requires Viewtron AI cameras)
- ~ USB Mouse and IR Remote Control (option)



www.viewtron.com

Viewtron by CCTV Camera Pros

7142 N Seacrest Blvd.
Lantana, FL 33462
United States of America

Tel: +1-561-433-8488
www.Viewtron.com

Fax: +1-800-942-0728
info@cctvcamerapro.net



64 Channel NVR (VT-NVR-64)

SPECIFICATIONS

Model		VVT-NVR-64	VT-NVR-128
System	OS	Embedded Linux	
Video	IP Video Input	64 CH	128 CH
	Incoming Bandwidth	640Mbps	640Mbps
	Outgoing Bandwidth	Display Priority: 128Mbps Network Priority: 640Mbps	Display Priority: 128Mbps Network Priority: 640Mbps
	IP Video Input Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF	
	Output	HDMI1: 3840×2160@60fps / 3840×2160@30fps / 1920×1080 / 1280×1024 / 1024×768 HDMI2: 1920×1080 / 1280×1024 / 1024×768 HDMI3: 1920×1080 / 1280×1024 / 1024×768 HDMI4: 1920×1080 / 1280×1024 / 1024×768 VGA×1: 1920×1080 / 1280×1024 / 1024×768	
	Multi-screen Display	1/4/6/8/9/13/16/25/32/36/64	
	Compression	H.265S/H.265+/H.265/H.264	
Audio	Network Input	64CH IPC audio input	128CH IPC audio input
	2-way Audio	RCA×1	
	Local Output	RCA×1	
	HDMI Audio Output	Yes	
	Compression	G.711(U/A)	
Record	Record Stream	Dual stream recording	
	Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF	
	Frame Rate	25fps (PAL) / 30fps(NTSC)	
	Mode	Manual/timed/motion/sensor/POS/AI recording	
Playback	Simultaneous Playback	Max 16 CH	
	Search	Time slice / time / event / tag / smart search	
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events	
Decoding Capability	Live/Playback	1CH 12MP/ 4CH 5MP/9CH 720P/16CH 720P	
Alarm	Mode	Manual, sensor, motion, exception, smart events	
	Input	24 CH local alarm input; IPC alarm input supported	
	Output	8 CH	
Face	Face Detection Performance (AI by IPC)	64 CH	128 CH
	Face Detection Performance (AI by Device)	4CH	
	Face Match Performance	16CH	
	Comparison Capability	36 pictures / second	
	Face Picture Database	32 libraries 10000 Face Pictures	
	Face Picture Search	Search by picture is supported	
	Database Management	Add, modify, delete and search face pictures	
	Face Picture Adding	Add face pictures through APP, WEB and external import	
	External face picture enrollment	Resolution: 128×128~1920×1080 Size: less than 70KB Format: jpg, jpeg	
	Face Picture Comparison	Support allow list, block list or stranger match alarm	
	Face Track	Yes	
Map of Face Track	Resolution: ≤2560×1920 Size: ≤512KB Format: jpg, jpeg		

Face	Statistic Graph of Face Information	Bar graph
	Statistic Mode of Face Information	Statistics by day, week, month, quarter as well as customized time period
Network	Interface	Rj45 10 / 100 / 1000 Mbps × 2
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP, HTTP, HTTPS, 802.1x, RTSP, ONVIF, etc.
	Client Connection	Max. 20 users access
Mobile Device	OS	iOS, Andriod
Storage	HDD Interface	SATA × 16, max 10T per HDD; e-SATA × 1
	RAID Type	RAID0, 1, 5, 6, 10
Backup	Local Backup	U disk, USB mobile HDD
	Network Backup	Yes
External Interface	USB	USB 2.0 × 2, USB 3.0 × 1
	Remote Controller	Optional
	RS 485	Yes (full-duplex), connect to PTZ or keyboard
	RS 232	Yes
	Reset	Yes
Others	Power Supply	ATX 300W
	Consumption	≤ 50W (without HDD)
	Dimensions	437mm×483mm×143mm
	Working Environment	-15 ~ 50 °C, Humidity: 10% ~ 90%
	Certificate	CE, FCC
	Environment Protection	Directive EU RoHS, WEEE(2012/19/EU), Directive 94/62/EC and REACH(EC1907/2006)



Features

- Supports 64/128CH 12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P IP Cameras
- Supports H.265S/H.265+/H.265/H.264 video encoding
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-mode recording: manual / timed / motion / sensor / POS / AI recording
- Recorded Video Playback : 16 CH simultaneous playback
- Search : time slice, time, event, tag, smart and target database search
- Supports face detection and comparison
- Supports Viewtron AI camera events, such as human and vehicle object detection, region intrusion, tripwire, license plate capture, face detection
- Supports POS information overlay on live view and playback
- Supports RAID 0, 1, 5, 6, 10
- Express and flexible backup via USB, network and so on
- Pentaplex : preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol
- Compatible with third-party IP Cameras via ONVIF
- Remote camera monitoring Mac and Windows software
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 4K output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QRCode scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Andriod OS



64 Channel NVR (VT-NVR-64)

DIMENSIONS

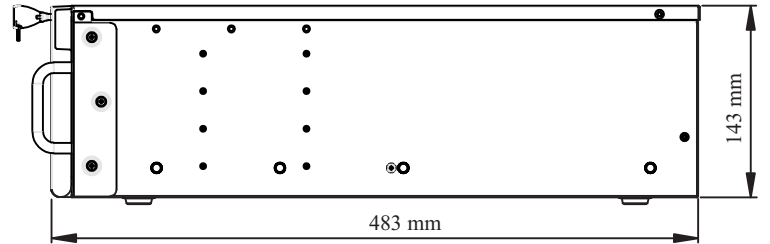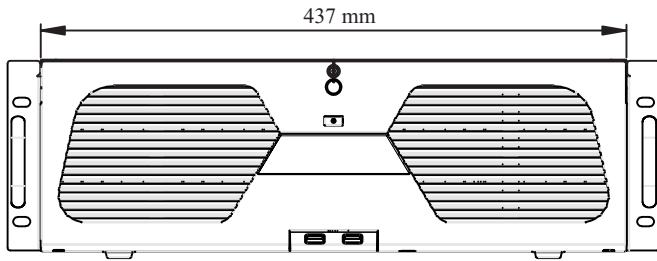

Rear Panel

