



16ch Security Camera DVR (5mp over coax)

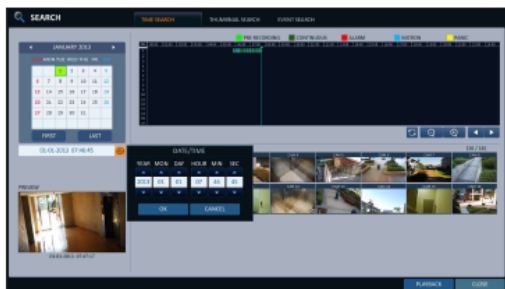


Features

- HD-TVI, AHD, Analog CCTV (CVBS) support
- 960H, 720p, 1080p, 4mp, 5mp
- Dual Monitor Output / Spot Monitor
- HDMI Monitor Output up to 4K
- VGA Monitor Output up to 1080p
- H.265 / H.264 video compression
- Android & iPhone Mobile Apps
- Windows & Mac Desktop Software

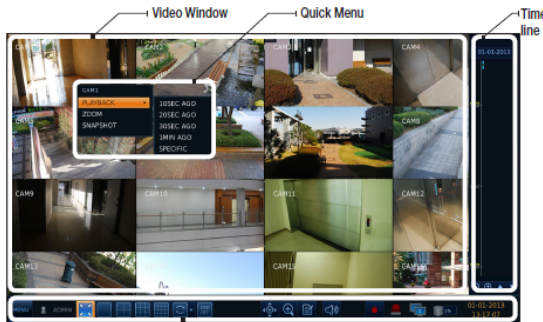

Rear Panel

1. Video in(BNC)
2. VGA
3. HDMI
4. eSATA
5. USB
6. Network
7. DC12V input
8. Audio in(RCA)
9. Audio out
10. Spot Out 1(1~8ch multi view)
Spot Out 2 (1~16ch multi view)
11. Relay out 1~4, Alarm in 1~8
12. Relay out 5~8, Alarm in 9~16
13. RS485, Alarm Out 1~8

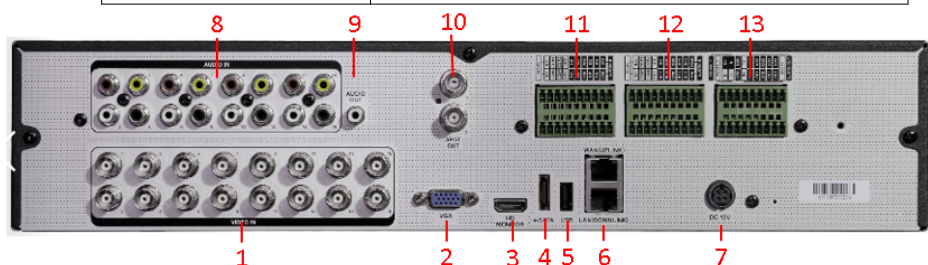

MODEL		iDVR-PRO16H
Video / Audio input		
Video Compression	H.264	
Video Input	16ch BNC(TVI, AHD, CVI, CVBS)	
Audio Compression	G.711u	
Audio	16 In(RCA), 1 out(RCA), CODEC:G.711	
Video output		
HDMI Output	1 X HDMI (4K, 1080P)-Main/Sub Monitor	
VGA Output	1 X VGA (1920 X 1080)-Main/Sub Monitor	
Frame Rate	15 fps/ch @ 5, 4MP, 30 fps/ch @ 3, 2, 1MP, CVBS	
SPOT OUT 1	1~8 ch Multi View BNC spot out	
SPOT OUT 2	1~16 ch Multi View BNC spot out	
Playback		
Playback Speed	Variable Playback (up to 64x)	
Instant playback	Instant playback mode for quick review	
Search Mode	Calendar, Event, Thumbnail Search	
D Zoom	Digital Zoom on Live & Playback	
Rec. Resolution	Max 5MP	
Hard Disk		
Capacity	Up to 6TB capacity for each HDD	
SATA	4 HDD + 1DVD	
External Interface		
Network Interface	1 RJ45 10M/100M	
USB Interface	2 @ Front, 1 @ Rear	
Serial Interface	RS-485 for PTZ & Keyboard	
Alarm in	16 ch	
Alarm out	8ch Relay + 8ch Open/Close	
General		
Power Supply	Output : DC12V,10A , Input:100~240V AC, 50~60Hz	
Operate Temperature	32°F~104°F	
Chassis	19-inch rack-mounted 2U chassis	
Dimension	16.9 x 14.5 x 3.5 inch	
Weight	10 lb	
CMS/Web/Smart Phone		
CMS	Windows & Macintosh	
Web	Web Browser Access	
Smart Phone Apps	iPhone & Android Mobile Apps	
DDNS	Free DDNS service built-in	