

VT-DVR-4

# 4 Channel Hybrid DVR



VT-DVR-4



HD



H.265



DDNS



Network



PTZ



Audio



MIC



Mobile



CMS



USB



Mouse



E-mail

- ~ Hybrid BNC Security Camera DVR / IP Camera NVR / 4ch BNC + 2 IP
- ~ Supports Analog CCTV (CVBS), HD-over-Coax, and Network IP Cameras
- ~ HD-TVI, AHD, HD-CVI HD-over-Coax Cameras Supported
- ~ 4K Live Display Output via HDMI, 1080p Display via VGA
- ~ Remote Access via Windows and Mac VMS Software
- ~ Remote Mobile Access via iPhone and Android Apps
- ~ Alarm Alerts via Email and Push Notification to Mobile Apps
- ~ USB Mouse Included, IR Remote Control Option

[www.viewtron.com](http://www.viewtron.com)**Viewtron by CCTV Camera Pros**

7142 N Seacrest Blvd.  
Lantana, FL 33462  
United States of America

Tel: +1-561-433-8488  
[www.Viewtron.com](http://www.Viewtron.com)


Fax: +1-800-942-0728  
[info@cctvcamerapros.net](mailto:info@cctvcamerapros.net)



### Features


- 4ch TVI/AHD/CVI 8MP/5MP/4MP/3MP/1080P/720P/WD1 video input
- 4ch DVR supports 2CH 8MP/5MP/4MP/3MP/1080P/720P/WD1 IP video input by default
- 4ch analog video input can be switched to 4ch IP video input
- Adopt standard H.265 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphics User Interface (GUI), window style operation by mouse
- Multi-mode recording: manual / timed / motion
- Playback : 4 CH simultaneously playback
- Search: time slice, time, event, tag and smart search
- Express and flexible backup via USB, network and so on
- Pentaplex: preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol
- Remote control via Web Client or CMS : preview, playback, backup, PTZ and configuration
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Authorization management, log review and device status review
- HDMI 4K output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QR Code scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Android OS

### Dimensions

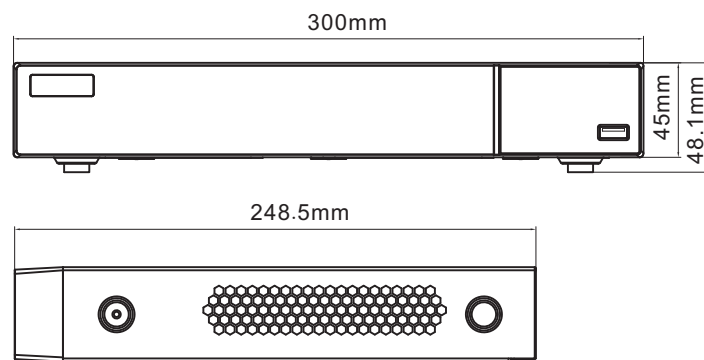

### Rear Panel

#### VT-DVR-4

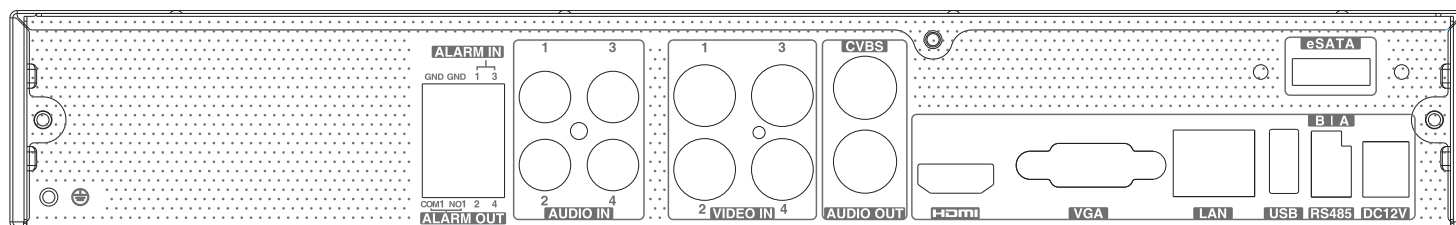



### Specifications

Model		VT-DVR-4
System	OS	Embedded Linux
Video	Analog Video Input	BNC × 4
		BNC interface (1.0Vp-p; 75Ω)
		HD-TVI / AHD / HD-CVI : 4K@15fps, 5MP@20fps, 4MP/3MP/1080P/720P/WD1@30fps (live)
	IP Video Input	2CH (up to 6CH)
		Up to 8MP@20fps; lower than 8MP@30fps
	Total Input	6 channel
	Output	HDMI × 1 : 3840 × 2160 / 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA × 1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768 BNC × 1 : CVBS ( used as the main or spot output )
	Compression	H.264/H.265
	Multi-screen Display	1/4/6/8/9
Audio	Input	RCA × 4
	Output	RCA × 1 (linear, 600Ω)
	Two-way audio	Take up channel one audio input
	Compression	G.711(U/A)
Record	Resolution	4K/4K Lite/5MP/5MP Lite/4MP/4MP Lite / 3MP/1080P/720P/WD1/D1
	Frame Rate	Analog Channel: 4K@6fps /7fps (PAL/NTSC) (only CH1 supports) 4K Lite@12fps/15fps (PAL/NTSC) 5MP@12fps (PAL / NTSC) 5MP Lite@20fps (PAL / NTSC) 4MP/3MP@12fps / 15fps (PAL / NTSC) 4MP Lite/1080P/720P/WD1/D1@25fps /30fps (PAL / NTSC) IP Channel: 8MP@ 20fps(PAL / NTSC); lower than 8MP@25fps / 30fps (PAL / NTSC)
	Bit Rate	32Kbps ~ 4Mbps
	Mode	Manual, timed, motion, smart event
Playback	Playback	4CH
	Search	Time slice / time / event / tag search
	Smart Search	Highlight colors to display the camera record in a certain period of time, different colors refer to different record events
	Function	Play, pause, FF, FB, digital zoom, etc.
Alarm	Mode	Manual, motion, exception, smart event
	Input	4CH
	Output	1CH
Network	Interface	RJ 45 100Mbps × 1
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, HTTP, HTTPS, NTP, SMTP
	Incoming Bandwidth	16Mbps
	Outgoing Bandwidth	40Mbps
	Client Connection	Max. 10 users access
Mobile Device	OS	iOS / iPhone App, Andriod App
Storage	HDD	SATA × 1, up to 10TB per HDD; E-SATA × 1
Backup	Local Backup	USB Hard Drive
	Network Backup	Yes
Port	RS 485	Yes (half-duplex), connect to PTZ or keyboard
	USB	USB 2.0 × 2
	Remote Controller	Optional
Others	Power Supply	DC12V / 2A
	Consumption	≤ 10W ( without HDD )
	Dimensions(mm)	300 × 249 × 45( W × D × H )
	Working Environment	-10~50°C, 10%~90% (humidity)
	Certificate	CE, FCC
	Environmental Protection	Comply with Directive EU RoHS, WEEE, REACH