




Viewtron 4K IP Camera NVR with PoE


Model: VT-NVR-8

8ch PoE NVR

12MP/8MP/6MP/5MP/4MP/3MP/1080P/960P/720P HD PoE NVR

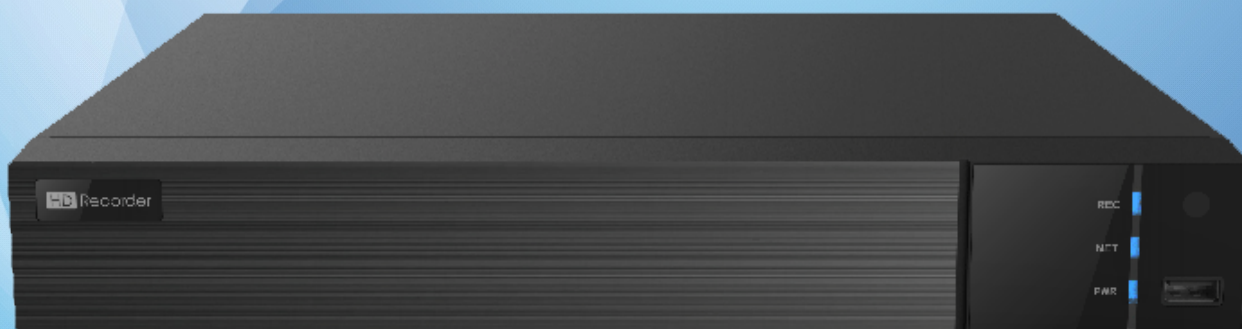

VT-NVR-8

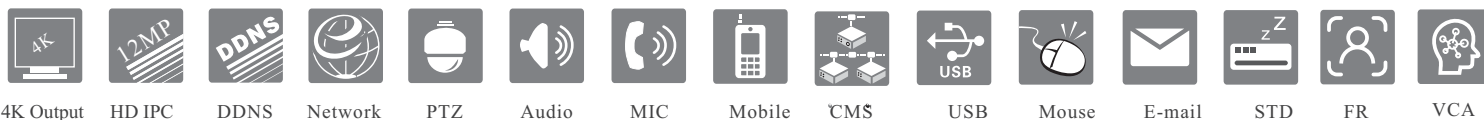

- ~ 8ch RJ-45 PoE Network Inputs for PoE IP Cameras
- ~ 12mp, 4K / 8mp, 6mp, 5,mp, 4mp, 3mp, 2mp / 1080p, 1mp / 720p Camera Support
- ~ 4K Live Display Output via HDMI, 1080p Display via VGA
- ~ 8ch Alarm Input, 4ch Alarm Output
- ~ 1 Hard Drive Bay
- ~ Remote Access via Windows and Mac CMS Software
- ~ Remote Mobile Access via iPhone and Android Apps
- ~ Alarm Alerts via Email and Push Notification to Mobile Apps
- ~ Facial Detection, License Plate Recognition (requires Viewtron AI cameras)
- ~ USB Mouse and IR Remote Control Included



www.viewtron.com

Viewtron by CCTV Camera Pros

7142 N Seacrest Blvd.
Lantana, FL 33462
United States of America

Tel: +1-561-433-8488
www.Viewtron.com

Fax: +1-800-942-0728
info@cctvcamerapros.net



VT-NVR-8

12MP/8MP/6MP/5MP/4MP/3MP/1080P
/960P/720P HD PoE NVR

SPECIFICATIONS

Model		VT-NVR-8
System	OS	Embedded Linux
Video	Compression	H.265S/H.265+/H.265/H.264
	IP Video Input	8ch PoE / RJ-45 input
	Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
	Network Bandwidth	80Mbps/80Mbps (incoming/outgoing)
	Output	HDMI : 3840 × 2160/1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA : 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA can be set to output the same or different video source with HDMI (spot monitor function)
Audio	Multi-screen Display	Main output: 1/4/6/8/9 (live view) AUX output: 1/4/6/8/9 (live view) Max. 8+8 CH local live view
	Network Input	8 CH IPC audio input
	2-way Audio	RCA × 1
	Local Output	RCA × 1
Record	Compression	G.711(U/A)
	Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
Playback	Frame Rate	12MP: 20fps 8MP or lower resolution: NTSC: 30fps; PAL: 25fps
	Simultaneous Playback	Max 8 CH
	Search	Time slice / time / event / tag / smart search
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
Decoding Capability	Function	Play, pause, FF, FB, digital zoom, etc.
	Live View/ Playback	1CH 12MP/4CH 1080P
Alarm	Mode	Manual, sensor, motion, exception, smart events, etc.
	Input	8 CH local alarm input
	Output	4 CH
	Triggering	Record, snap, preset, e-mail, etc.
Face	Face Detection Performance (AI by IPC)	8 CH
	Face Detection Performance (AI by Device)	2 CH
	Face Match Performance	6 CH
	Comparison Capability	18 pictures / second
	Face Picture Database	32 libraries 10000 Face Pictures
	Face Picture Search	Search by picture is supported
	Database Management	Add, modify, delete and search face pictures
	Face Picture Adding	Add face pictures through APP, WEB and external import
	Face Picture Comparison	Supports allow list, block list and stranger match alarm
	Track	Track display on a map
	Statistical Graph of Information	Bar graph
	Statistical Mode of Information	Statistics by day, week, month, quarter as well as customized time period

Video Structure Analysis	Human/Vehicle Classification	Yes
Other Functions	Fisheye	Supports fisheye dewarping via Web Client and mobile APP
	Plate Recognition (AI by IPC)	Yes
PoE	PoE Port	RJ 45 100Mbps × 8
	Standard	IEEE802.3AF/AT
	Output Power	≤ 96W
Network	Interface	RJ 45 1000 Mbps × 1
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP, HTTP, HTTPS, 802.1x, RTSP, SNMP, ONVIF, etc.
	Client Connection	Max. 64 users remote access
Mobile Device	OS	iPhone / iOS, Android
Storage	HDD Interface	SATA × 1, max 10T
Backup	Local Backup	U disk, USB mobile HDD
	Network Backup	Yes
External Interface	RS 485	Yes (full-duplex), connect to PTZ or keyboard
	USB	USB 3.0 × 1 ; USB 2.0 × 2
	Remote Controller	Optional
Others	Power Supply	DC48V/2.5A
	Consumption	≤ 20W (without HDD and PoE power supply)
	Certificate	CE, FCC
	Environmental Protection	Complies with Directive EU RoHS, REACH and WEEE
	Dimensions(mm)	300 × 249 × 45 (W × D × H)
	Working Environment	-10 ~ 50 ℃, 10% ~ 90% humidity

Features



- Supports 8 CH 12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF IPC Input
- H.265S/H.265+/H.265/H.264
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-type recording: manual / timed / motion / sensor / POS / AI recording
- Playback : 8 CH simultaneous playback
- Search : time slice, time, event, tag and smart search
- Supports face detection and comparison
- Supports multiple VCA (Video Content Analytics) events, such as object abandoned/missing, region intrusion, tripwire, video exception, etc.
- Supports license plate recognition
- Supports POS information overlay on live view and playback
- Pentaplex : preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol
- Compatible with third-party IPCs, such as ONVIF, Hikvision, etc.
- Remote control via Web Client or CMS : preview, playback, backup, PTZ and configuration
- Supports 8CH PoE IP camera direct connection to NVR via PoE ports
- Supports Multi-user remote log on simultaneously (mobile and desktop apps)
- Authorization management, log view and device status view
- 4K HDMI output, true high resolution display
- Supports PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Supports NAT function and QRCode scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Android OS




VT-NVR-8

12MP/8MP/6MP/5MP/4MP/3MP
/1080P/960P/720P HD PoE NVR

DIMENSIONS

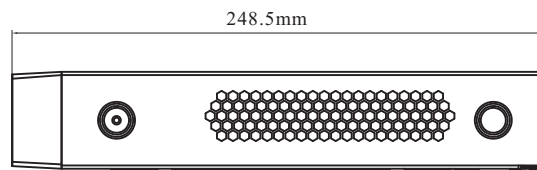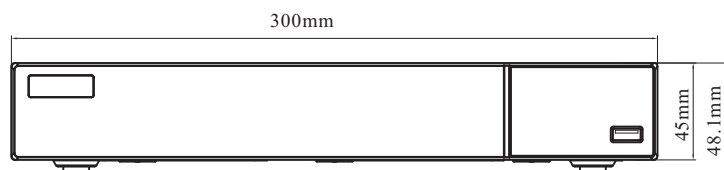

Rear Panel

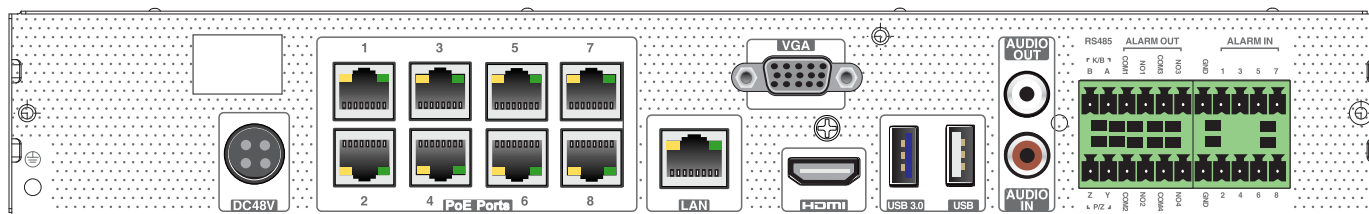

CCTV Camera Pros highly recommend Viewtron IP cameras for use with Viewtron NVRs.

- [Viewtron IP Cameras](#)
- [Viewtron AI Security Cameras](#)
- [Viewtron LPR Camera Systems](#)
- [Viewtron Security Camera System Video Demos](#)