


4ch 5MP Security Camera DVR (HD over Coax)



Key Features

- HD-TVI, AHD, Analog CCTV camera support
- 960H, 720p, 1080p, 4mp, 5mp camera support
- Dual Monitor Output / Spot Monitor
- HDMI Monitor Output up to 4K
- VGA Monitor Output up to 1080p
- H.265 / H.264 video compression
- Android & iPhone Mobile Apps
- Windows & Mac Desktop Software

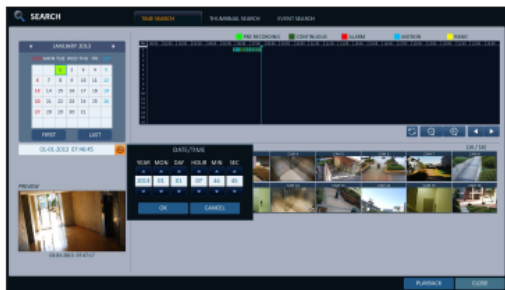

Rear Panel

1. Video in(BNC)
2. Audio Input
3. Audio Out
4. HDMI
5. Network
6. Alarm in 1~4
7. DC12V input
8. Spot Out(BNC)
9. VGA
10. RS485, Relay out

MODEL	Atlas TVI 4S 4K
Video / Audio input	
Video Compression	H.265/264
Video Input	8ch BNC (HD-TVI, AHD, Analog CVBS)
Supporting Video	1-5MP@30fps:TVI/AHD/IP, CVBS
Audio Compression	G.711u
Audio	4 In(RCA), 1 out(RCA), CODEC:G.711
Video output	
HDMI Output	1 X HDMI (4K)
VGA Output	1 X VGA (1920 X 1080),) Independent(or Simulation of HDMI)
Spot Out(BNC)	Programmable 1~9 view, Sequencing
Live Frame Rate	30 fps per channel
Playback	
Playback Speed	Variable Playback (up to 64x)
Instant playback	Instant playback mode for quick review
Search Mode	Calendar, Event, Thumbnail Search
D Zoom	Digital Zoom on Live & Playback
Record Frame Rate/camera	30fps@2MP, 30fps@4MP, 12fps@5MP
Hard Disk	
Capacity	Up to 12TB capacity for each HDD
HDD	1 HDD
External Interface	
Network Interface	1 RJ45 10M/100M
USB Interface	2 @ Front
Serial Interface	RS-485 for PTZ
Alarm in	4 ch
Alarm out	1ch Relay
General	
Power Supply	Output : DC12V,2A , Input:100~240V AC, 50~60Hz
Operate Temperature	32°F~104°F
Dimension	10.25x11x2 inch
Weight	5 lb
CMS/Web/Smart Phone	
CMS	IPIMS
Web	All Ch live view & playback
Smart Phone Apps	nViewer,4ch live view/play back
DDNS	Free DDNS service(Preregistered)

